

Overview

Analog Devices has developed a low cost, low power embedded compute ting a vast array of real-time sensing applications. The Blackfin® Low Power Imaging latest entry within the industry-leading, low power Blackfin processor family as Devices optimized software library deliverables. This solution offers end equipment manufactu an out of the box form factor development platform with multiple functional profiles covering in igent motion sensing, people counting, vehicle detection, and face detection deployable in both indoor a outdoor use cases. The BLIP system includes an intuitive configuration GUI and enables real-time analysis video, as well as video output/display through an on-board USB port, making it a highly value for product development. Additionally, the associated documentation package is well positioned to help customers accelerate their time to market.

Target Applications Include:

- Indoor/outdoor lighting control
- HVAC system control
- Access control systems
- ing guidance systems monitoring systems ccupancy detection
- istics/retail analytics

BLIP Deployment Model



ADI and our partners can facilitate an application specific/custom BLIP implementation.

BLIP Appearance



Top view.



Bottom view.



















BLIP Block Diagram

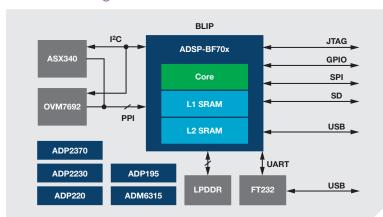

System GUI

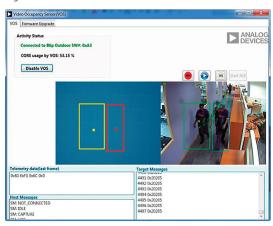

Video Occupancy Sensor Module

The Analog Devices BLIP hardware platform is a pred with preloaded occupancy software module that has been optimized to detect the presence and behavior of humans or vehicle within a loor and outdoor environments. This advanced detection operation provides significantly improved performance compared to single pixel PIR sensor solutions, betting lighting control, climate control, and access control applications.

Blackfin Image Processing Toolbox

The Analog Devices video occupancy sensor software make and it is a mage analysis module deliverables are based upon the Blackfin image processing toolbox. This toolbox is a set of image processing rimitives designed to enable faster development of complex image or video processing solutions for use on Blackfin processors. These primitive unctions to be able to achieve the most efficient results possible on the Blackfin ADSP-BF5xx, ADSP-BF60x, and ADSP-BF70 amilies devices. This allow library is MISRA-C compliant and also includes C reference code for the primitives and wrapper code layers for OpenCV like Pls.

Blackfin Low Power Imaging Platform Specification and Jet

Major Active System Components


- ► Processor: ADSP-BF707BBCZ-4
- Imagers: OVM7692 (VGA SoC sensor with integrated lens—64° FOV up to 3 meter range ASX-340 (VGA sensor with external optics can achieve wide angle FOV with up to 10 meters.
- Memory: MT46H128M16LFB7 (256 MB)
- ► Flash: W25Q32 (32 MB)
- Power management: ADP2370, ADP2230, ADP220, ADP195, ADM6315
- Interface: FT232RQ

Specifications

Power consumption: <1 W
Supply voltage: 3.2 V to 15 V
Form factor: 2.5" × 3.5"

Board Support Package

- Development tool chain: CrossCore® Embedded Studio™
- ► Application software: VOS 3.2.0 (indoor/outdoor)
- Documentation: user guide, PCB schematics





Analog Devices, Inc. Worldwide Headquarters

Analog Devices, Inc. One Technology Way P.O. Box 9106 Norwood, MA 02062-9106 U.S.A. Tel: 781.329.4700 (800.262.5643, U.S.A. only) Fax: 781.461.3113 Analog Devices, Inc. Europe Headquarters

Analog Devices, Inc. Wilhelm-Wagenfeld-Str. 6 80807 Munich Germany Tel: 49.89.76903.0 Fax: 49.89.76903.157 Analog Devices, Inc. Japan Headquarters

Analog Devices, KK New Pier Takeshiba South Tower Building 1-16-1 Kaigan, Minato-ku, Tokyo, 105-6891 Japan Tel: 813.5402.8200 Fax: 813.5402.1064 Analog Devices, Inc. Asia Pacific Headquarters

Analog Devices 5F, Sandhill Plaza 2290 Zuchongzhi Road Zhangjiang Hi-Tech Park Pudong New District Shanghai, China 201203 Tel: 86.21.2320.8000 Fax: 86.21.2320.8222 ©2015 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners. Ahead of What's Possible is a trademark of Analog Devices. Printed in the U.S.A. PH12140c-.05-7/15(B)

analog.com

